
PATLITE (CHINA) Corporation
Room706-707, Baohua International Plaza,Lane.555,
Guangzhong Road(West), Jingan District, Shanghai, China
Tel: +86(0)21 66308959 Fax: +86(0)21 66308938

PART NO.

MBL-DC1030VJK-B
MBL-DC1030VJK-R

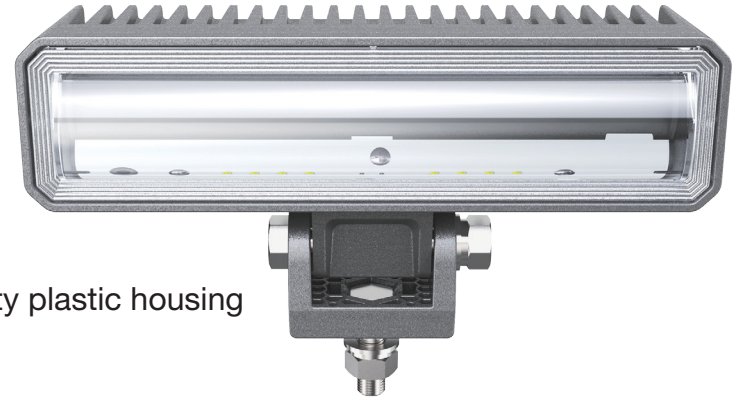

Specification:

Voltage: DC 10-30V

Power: B: 25.20W-25.65W
R: 20.16W-20.25W

Material: Lens: PC
Housing: High thermal conductivity plastic housing

Mounting Method: Bolt installation (M8)

Connection Method: 500mm Cable

Parts Dimension & Installation Notes:

1:Refer to the product dimension on the right. Ensure that there is sufficient installation space for the product before installation.

2:Confirm the bolt specifications and use the appropriate tool before installation.

3:Confirm the wire color and connect the corresponding functions by color before connecting. (as shown below)

Wire color	Function
Red	VCC ⊕
Black	GND ⊖

(Unit:mm)

